

DCR-1008 Ultrasonic Controller




The DCR-1008 controller and DST series ultrasonic sensors work together to allow simple level monitoring and control without the need of a more advanced system. This system performs reliably to meet your application needs today. With several sensors to choose from, and a variety of mounts, ranges, and outputs, there are plenty of options for your application needs.

Features

- 4 Buttons for easy programming
- Analog and relays
- Controller and sensor can be separated up to 2000 ft (650 m)
- Microprocessor with E² memory retains settings on power loss

DCR-1008 Specifications

DCR-1008

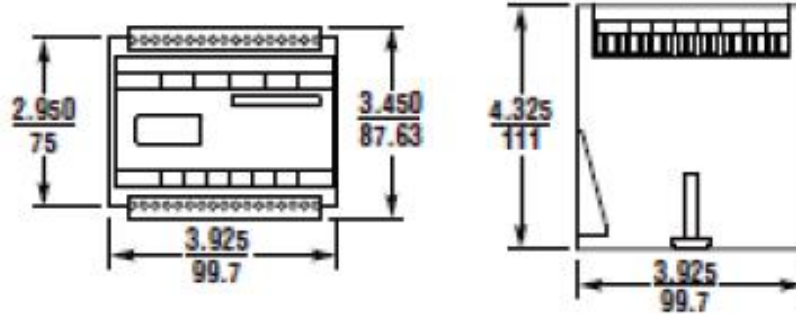

Performance

Outouts

- 4 Relays
- 4-20 mA

Connectivity

Inputs:

- DST Sensor
- 4-20 mA
- 4 Dry contacts

Method:

- Terminal Strips

Internet Connectivity:

- RST-5002

Certification

- NEMA 1, IP10

Electrical

- Supply voltage: 100 - 240 VAC
- 24 VDC

Programming

- Programmable Keypad

Physical

Display

- 8 Character LCD

Housing

- Polycarbonate

Environmental

- Ratings: NEMA 1, IP10
- Operating Temp: -22° - 140°F (-30° - 60°C)

Options

Part Number: DCR- _____
A

A. Model

1008

Outputs

4 relays and 4-20 mA output

Inputs

DST Sensor, 4-20 mA and 4 dry contacts

DCR Accessories

Please order separately, by part number.

Description	Part Number
Order one DST per DCR controller	
DST-1001	125204
DST-1002	125205
DST-2421	125646
DST-3431	125659
DST-5111	125607
DST-9421	125647
RST-5001	125701